




PLAN

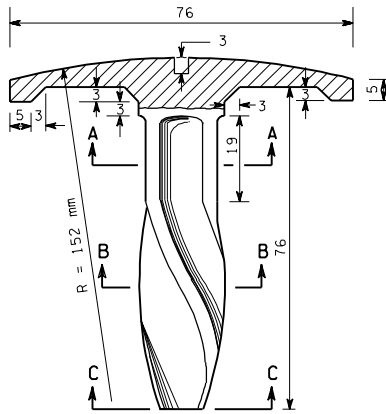


ELEVATION
BRASS DISC




SECTION A-A



SECTION B-B




SECTION C-C




DETAIL OF GROOVE
FOR 7 mm LETTERS


NOTE:
Dotted letters to be
5 mm high and will
be stamped by WSDOT
Personnel. Only the
assigned identification
numbers are to appear
on the brass disc.



DETAIL OF GROOVE
FOR 5 mm LETTERS

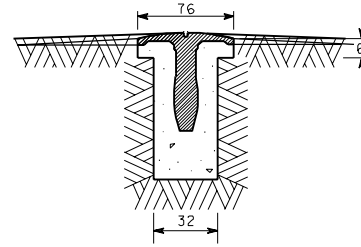

LEDGE ROCK OR CONCRETE
INSTALLATION

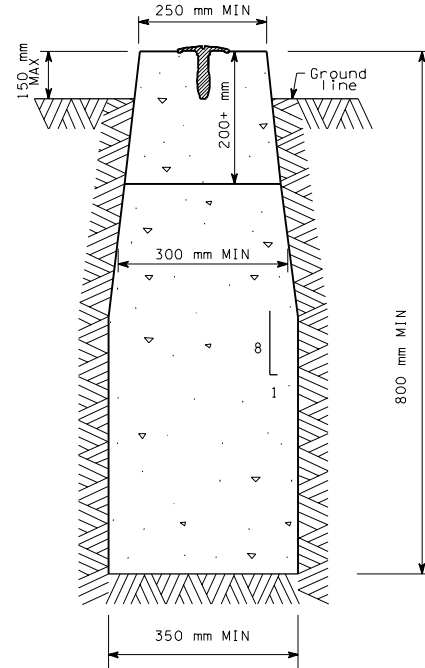

SECTION
GENERAL INSTALLATION

NOTE

1. The brass disc will be furnished by the state.
2. The hole shall be 800 mm minimum in depth or 150 mm below the deepest recorded frost line. All loose material shall be removed from the bottom of the hole so that the concrete is placed on firm undisturbed earth.
3. The top of the concrete shall be troweled smooth and the brass disc set in the center with top flush and level. When the concrete is set, cover the entire monument with moist earth and leave for three days.
4. Top of monument may be recessed or protruding depending on conditions.

ALL DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE NOTED.

SURVEY MONUMENT

STANDARD PLAN H-6

APPROVED FOR PUBLICATION

STATE DESIGN ENGINEER

DATE

WASHINGTON STATE DEPARTMENT OF TRANSPORTATION
OLYMPIA, WASHINGTON